A934-212C-044 *Touch Screen Control System*

Caratteristiche Generali

- Fade Out Backlight automatico
- Macro setting che assegna ad ogni singolo tasto fino a 16 differenti ordini
- Default 3x4 matrix su 12 tasti
- RS-232 o RS485 selezionabili
- Utilizzabile con numerosi moduli

DESCRIPTION

The ABtUS A934-212C-044 touch control panel uses a standard 4-wire resistive touch panel, which allows up to a total of 32 command codes with complete user programmable software.

User friendly Software which allows customized programming such as macro settings, feedback events, control commands, etc. Another characteristic is the panel button layout and design, it can be easily customized and printed out accordingly with icons or clear text buttons

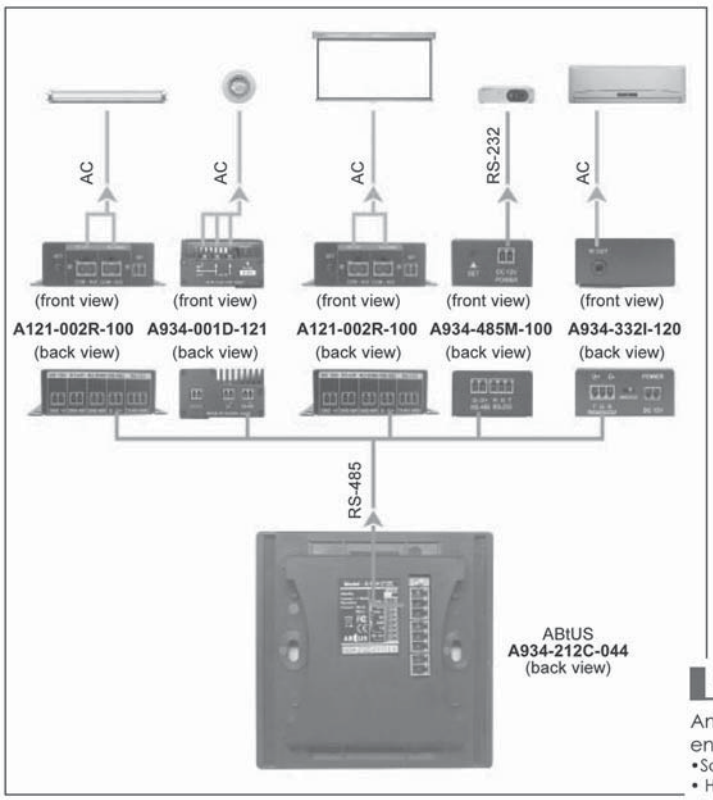

FEATURES

- Feature with automatic backlight fade out
- Macro definitions setting can be assign for every single button up to 16 difference order
- Default 3 × 4 matrix of 12 touch buttons
- With 1 × RS-232 or 1 x RS-485 selectable and 1 × RS-232
- Ultra low power consumption

TECHNICAL SPECIFICATION

INPUT VOLTAGE:	12V-DC, 350mA
BACK LIGHT:	With white LED light guide plate
COMMUNICATION STANDARD:	RS-232 or RS485 (*Selectable) 1 × RS-232 or 1 × RS-485
CONFIGURABLE COM PORT:	(7 or 8 Data Bit and 1 or 2 Stop Bit)
BAUD RATE:	1200 to 38400
PARITY BIT:	Non, Even or Odd
TOTAL NUMBER OF BUTTON:	12
TOTAL NUMBER OF COMMAND SET ALLOW:	32
STANDBY CURRENT:	35mA
OPERATION CURRENT:	65mA
HOUSING:	ABS
ACCESSORIES:	AC-DC Power Adaptor 12V-DC, 500mA 1 × 2 Pin, 2 × 3 Pin Terminal Block

TYPICAL APPLICATIONS

Any professional control system requiring multiple lighting/dimming or environmental control.
•Schools (Media Classrooms) • Churches • Corporate Applications (Meeting Rooms)
• Home Automation •Home Theaters • Hotels In Room Control