



Dynamic Audio Solutions

GTP

Passive full range speaker



www.audiocenter.net



Dynamic Audio Solutions

GTP Passive full range speaker

La serie GTP sono una linea di altoparlanti passivi professionali progettati per la sonorizzazione mobile e l'installazione fissa.

La serie GTP ha un utilizzo polivalente in sale polifunzionali, sale conferenze multimediali, aule magne, musei, centri espositivi, luoghi religiosi, teatri, palchi e altri tipi di installazioni.

CARATTERISTICHE GENERALI

- ⊙ Elevate prestazioni, livello di pressione sonora fino a 136 dB
- ⊙ Tromba HF ruotabile
- ⊙ Unità progettate su misura
- ⊙ Design compatto della struttura simmetrica
- ⊙ Base a doppio foro (0°/10°)
- ⊙ Collocazione flessibile, facile da usare



Together we are stronger

GT508P Passive crossover full range speaker

GT508P è un altoparlante con crossover integrato, ampiamente utilizzato in sale per funzioni multimediali, musei, luoghi religiosi, spazi commerciali e altri luoghi di installazione fissa.



Il cabinet è realizzato in legno di alta qualità, con una struttura simmetrica multiuso innovativa e compatta lavorata a CNC. Ciò fornisce una qualità del suono perfetta chiara e potente. I fori di montaggio della base sono disponibili nelle opzioni 0° o 10°. In base ai diversi luoghi e metodi di installazione, può soddisfare diversi ambienti di installazione di rinforzo sonoro.

- ⊙ Potenza nominale (AES): 150 W (AES)
- ⊙ SPL/1M (continuo/picco): 117dB/123dB
- ⊙ Driver LF: driver personalizzato da 8", bobina mobile da 2,0"
- ⊙ Driver HF: driver personalizzato, bobina mobile da 1,75"
- ⊙ Angolo di copertura orizzontale (simmetrico): 90°/60°
- ⊙ Angolo di copertura verticale (simmetrico): 60°/90°



Dynamic Audio Solutions

GT508P Passive crossover full range speaker



Specifications

Type	Passive crossover full range speaker
Frequency Response (-6dB anechoic chamber)	60Hz-20kHz
Rated power(AES)	150W
Maximum Calculated SPL/1M(Continuous/Peak)	119dB/125dB
LF Driver	Customized 8", 2" voice coil
HF Driver	Customized, 1.0" exit, 1.75" voice coil
Horizontal Coverage Angle (Symmetrical)	90°(60°)
Vertical Coverage Angle (Symmetrical)	60°(90°)
Rated Impedance	8Ω (+1, -1)
Input Connectors	2x NL4MP
Cabinet	
Cabinet Material	CNC machined plywood
Monitor Angle	/
Pole Mount	Base hole Φ35mm, 0° or 10° options
Hanging Hardwares	M8 screw
Optional accessories	U bracket
Cabinet Color	Black is the default color. Contact Audiocenter for customization
Coating	Durable Polyurea Coating
Dimension (W×H×D)	245x447x320mm
Net Weight	11.0Kg

GT510P Passive crossover full range speaker



GT510P è un altoparlante con crossover integrato, ampiamente utilizzato in sale per funzioni multimediali, musei, luoghi religiosi, spazi commerciali e altri luoghi di installazione fissa.

Il cabinet è realizzato in legno di alta qualità, con una struttura simmetrica multiuso innovativa e compatta lavorata a CNC. Ciò fornisce una qualità del suono perfetta chiara e potente. I fori di montaggio della base sono disponibili nelle opzioni 0° o 10°. In base ai diversi luoghi e metodi di installazione, può soddisfare diversi ambienti di installazione di rinforzo sonoro.

- ⊙ Potenza nominale (AES): 250 W (AES)
- ⊙ SPL/1M (continuo/picco): 120dB/126dB
- ⊙ Driver LF: driver personalizzato da 10", bobina mobile da 2,5"
- ⊙ Driver HF: driver personalizzato, bobina mobile da 1,75"
- ⊙ Angolo di copertura orizzontale (simmetrico): 90°/60°
- ⊙ Angolo di copertura verticale (simmetrico): 60°/90°



Dynamic Audio Solutions

GT510P Passive crossover full range speaker



Specifications

Type	Passive full range speaker
Frequency Response (-6dB anechoic chamber)	50Hz-20kHz
Rated power(AES)	250W
Maximum Calculated SPL/1M(Continuous/Peak)	124dB/130dB
LF Driver	Customized 10", 2.5" voice coil
HF Driver	Customized 1.0" exit, 1.75" voice coil
Horizontal Coverage Angle (Symmetrical)	90°(60°)
Vertical Coverage Angle (Symmetrical)	60°(90°)
Rated Impedance	8Ω (+1, -1)
Input Connectors	2x NL4MP
Cabinet	
Cabinet Material	CNC machined plywood
Monitor Angle	/
Pole Mount	Base hole Φ35mm, 0° or 10° options
Hanging Hardwares	M8 screw
Optional accessories	U bracket
Cabinet Color	Black is the default color. Contact Audiocenter for customization
Coating	Durable Polyurea Coating
Dimension (W×H×D)	288x526x325mm
Net Weight	13.0Kg

GT512P Passive crossover full range speaker



GT512P è un altoparlante con crossover integrato, ampiamente utilizzato in sale per funzioni multimediali, musei, luoghi religiosi, spazi commerciali e altri luoghi di installazione fissa.

Il cabinet è realizzato in legno di alta qualità, con una struttura simmetrica multiuso innovativa e compatta lavorata a CNC. Ciò fornisce una qualità del suono perfetta chiara e potente. I fori di montaggio della base sono disponibili nelle opzioni 0° o 10°. In base ai diversi luoghi e metodi di installazione, può soddisfare diversi ambienti di installazione di rinforzo sonoro.

- ⊙ Potenza nominale (AES): 400 W (AES)
- ⊙ SPL/1M (continuo/picco): 124dB/130dB
- ⊙ Driver LF: driver personalizzato da 12", bobina mobile da 3,0"
- ⊙ Driver HF: driver personalizzato, bobina mobile da 1,75"
- ⊙ Angolo di copertura orizzontale (simmetrico): 90°/60°
- ⊙ Angolo di copertura verticale (simmetrico): 60°/90°



Dynamic Audio Solutions

GT512P Passive crossover full range speaker



Specifications

Type	Passive full range speaker
Frequency Response (-6dB anechoic chamber)	45Hz-20kHz
Rated power(AES)	400W
Maximum Calculated SPL/1M(Continuous/Peak)	128dB/134dB
LF Driver	Customized 12", 3" voice coil
HF Driver	Customized 1.0" exit, 1.75" voice coil
Horizontal Coverage Angle (Symmetrical)	90°(60°)
Vertical Coverage Angle (Symmetrical)	60°(90°)
Rated Impedance	8Ω (+1, -1)
Input Connectors	2x NL4MP
Cabinet	
Cabinet Material	CNC machined plywood
Monitor Angle	Symmetrical 45° monitoring Angle
Pole Mount	Base hole Φ35mm, 0° or 10° options
Hanging Hardwares	M8 screw
Optional accessories	U bracket
Cabinet Color	Black is the default color. Contact Audiocenter for customization
Coating	Durable Polyurea Coating
Dimension (W×H×D)	355x599x349mm
Net Weight	19.0Kg

GT515P Passive crossover full range speaker



GT515P è un altoparlante con crossover integrato, ampiamente utilizzato in sale per funzioni multimediali, musei, luoghi religiosi, spazi commerciali e altri luoghi di installazione fissa.

Il cabinet è realizzato in legno di alta qualità, con una struttura simmetrica multiuso innovativa e compatta lavorata a CNC. Ciò fornisce una qualità del suono perfetta chiara e potente. I fori di montaggio della base sono disponibili nelle opzioni 0° o 10°. In base ai diversi luoghi e metodi di installazione, può soddisfare diversi ambienti di installazione di rinforzo sonoro.

- ⊙ Potenza nominale (AES): 400 W (AES)
- ⊙ SPL/1M (continuo/picco): 130dB/136dB
- ⊙ Driver LF: driver personalizzato da 15", bobina mobile da 3,0"
- ⊙ Driver HF: driver personalizzato, bobina mobile da 1,75"
- ⊙ Angolo di copertura orizzontale (simmetrico): 90°/60°
- ⊙ Angolo di copertura verticale (simmetrico): 60°/90°



Dynamic Audio Solutions

GT515P Passive crossover full range speaker




Specifications

Type	Passive full range speaker
Frequency Response (-6dB anechoic chamber)	42Hz-20kHz
Rated power(AES)	400W
Maximum Calculated SPL/1M(Continuous/Peak)	130dB/136dB
LF Driver	Customized 15", 3" voice coil
HF Driver	Customized 1.0" exit, 1.75" voice coil
Horizontal Coverage Angle (Symmetrical)	90°(60°)
Vertical Coverage Angle (Symmetrical)	60°(90°)
Rated Impedance	8Ω (+1, -1)
Input Connectors	2x NL4MP
Cabinet	
Cabinet Material	CNC machined plywood
Monitor Angle	Symmetrical 45° monitoring Angle
Pole Mount	Base hole Φ35mm, 0° or 10° options
Hanging Hardwares	M8 screw
Optional accessories	U bracket
Cabinet Color	Black is the default color. Contact Audiocenter for customization
Coating	Durable Polyurea Coating
Dimension (W×H×D)	421x696x416mm
Net Weight	22.0Kg



Dynamic Audio Solutions

Accessories



Horizontal U bracket

Supports up to 60KG




Protective bag



Pole bar

Supports up to 50KG

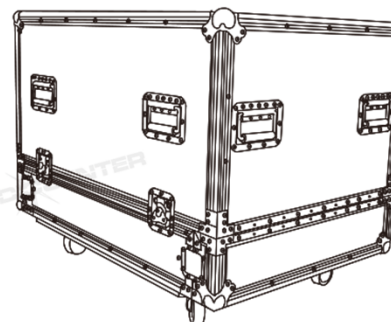








Flightcase

For 2 cabinets,
with 100mm wheels



Dynamic Audio Solutions

Installations

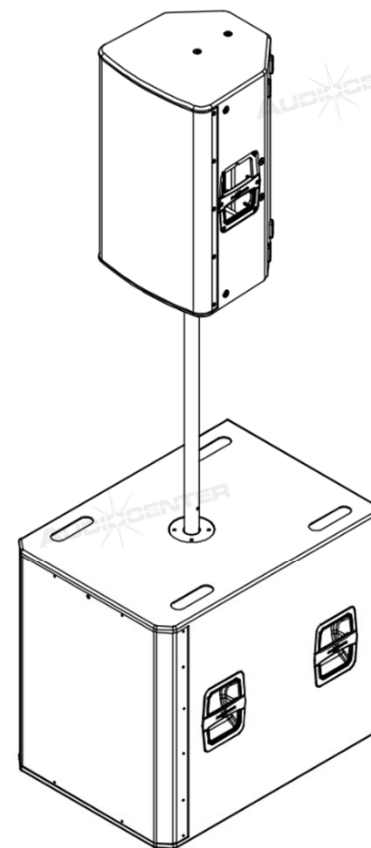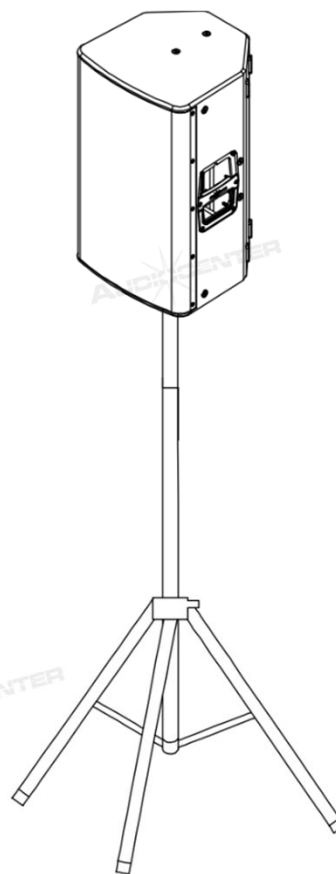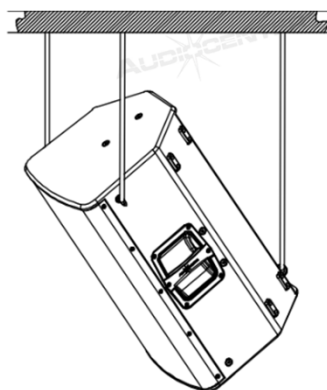

Together we are stronger



Dynamic Audio Solutions

Specifications

	GT508P	GT510P	GT512P	GT515P
Type	Passive crossover full range speaker	Passive crossover full range speaker	Passive crossover full range speaker	Passive crossover full range speaker
Frequency Response	60Hz-20kHz	50Hz-20kHz	45Hz-20kHz	42Hz-20kHz
(-6dB anechoic chamber)	150W	250W	400W	400W
Rated power(AES)	119dB/125dB	124dB/130dB	128dB/134dB	130dB/136dB
Maximum Calculated				
SPL/1M(Continuous/Peak)	Customized 8"driver, 2" voice coil	Customized 10"driver, 2.5" voice coil	Customized 12"driver, 3" voice coil	Customized 15"driver, 3" voice coil
LF Driver	Customized driver, 1.0" exit, 1.75"	Customized driver, 1.0" exit, 1.75"	Customized driver, 1.0" exit, 1.75"	Customized driver, 1.0" exit, 1.75"
HF Driver	voice coil	voice coil	voice coil	voice coil
Horizontal Coverage	90°(60°)	90°(60°)	90°(60°)	90°(60°)
Angle (Symmetrical)				
Vertical Coverage	60°(90°)	60°(90°)	60°(90°)	60°(90°)
Angle (Symmetrical)				
Rated Impedance	8Ω (+1, -1)	8Ω (+1, -1)	8Ω (+1, -1)	8Ω (+1, -1)
1 Way Amplifier drive	2pcs maximum, 4Ω	2pcs maximum, 4Ω	2pcs maximum, 4Ω	2pcs maximum, 4Ω
Input Connectors	2x NL4MP	2x NL4MP	2x NL4MP	2x NL4MP
Cabinet				
Cabinet Material	CNC machined plywood	CNC machined plywood	CNC machined plywood	CNC machined plywood
Monitor Angle	/	/	Symmetrical 45° monitoring Angle	Symmetrical 45° monitoring Angle
Pole Mount	Base hole Φ35mm, 0° or 10° options	Base hole Φ35mm, 0° or 10° options	Base hole Φ35mm, 0° or 10° options	Base hole Φ35mm, 0° or 10° options
Hanging Hardwares	M8 screw	M8 screw	M8 screw	M8 screw
Optional accessories	U bracket	U bracket	U bracket	U bracket
Cabinet Color	Black is the default color. Contact Audiocenter for customization	Black is the default color. Contact Audiocenter for customization	Black is the default color. Contact Audiocenter for customization	Black is the default color. Contact Audiocenter for customization
Coating	Durable Polyurea Coating	Durable Polyurea Coating	Durable Polyurea Coating	Durable Polyurea Coating
Dimension (W×H×D)	245x447x320mm	288x526x325mm	355x599x349mm	421x696x416mm
Net Weight	11.0Kg	13.0Kg	19.0Kg	22.0Kg



Dynamic Audio Solutions


Application




Band



DJ

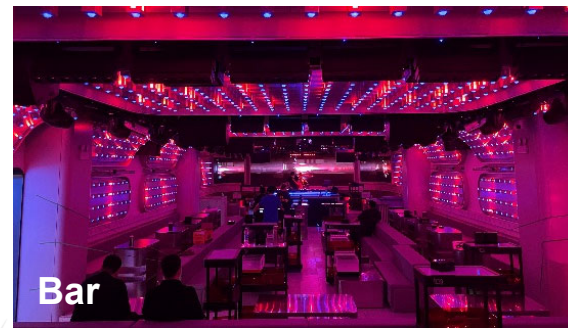

Bar

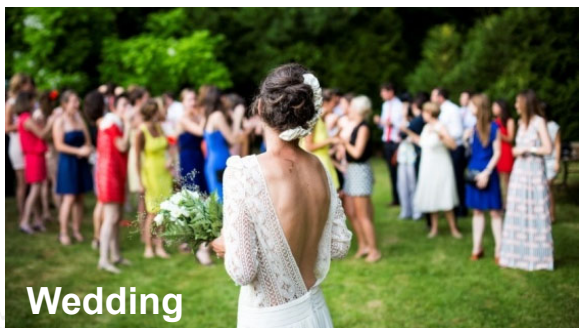


Wedding




Meeting room



lecture

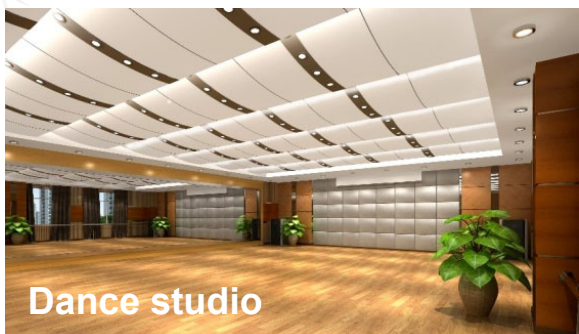

Dance studio

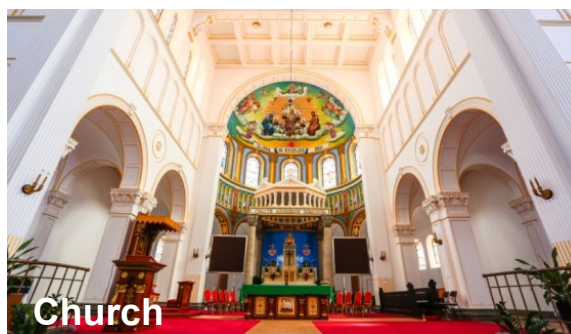

Church



museum

Together we are stronger